


RECEIVERS

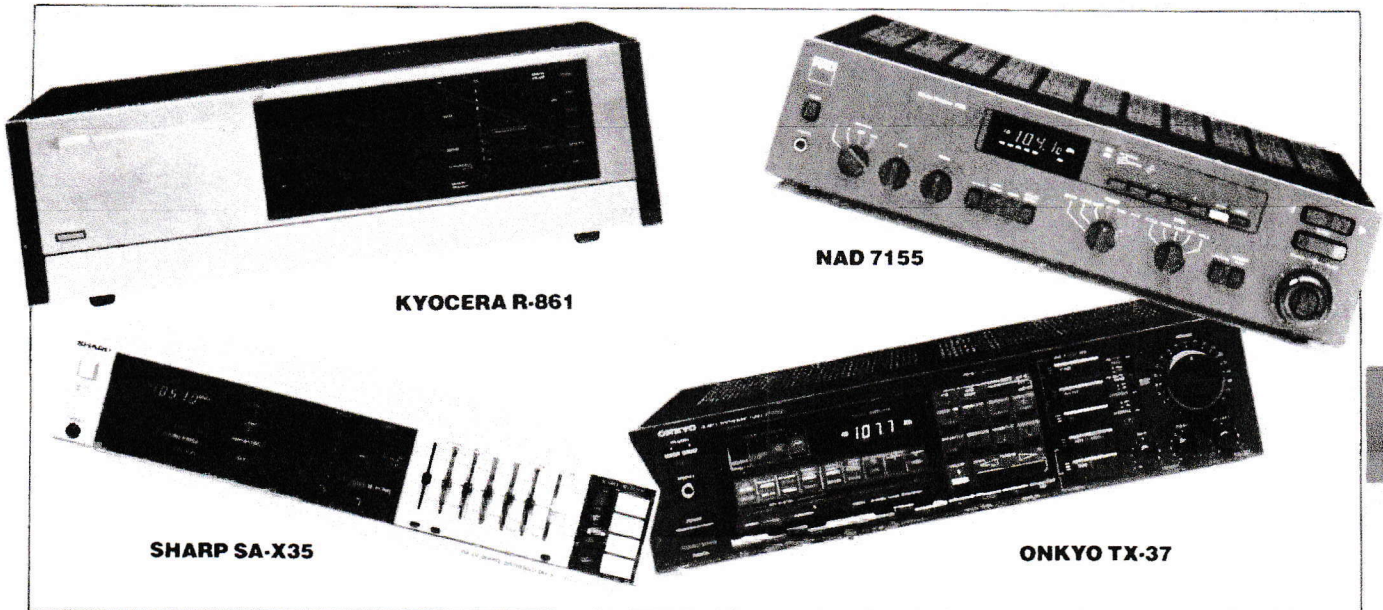

MANUFACTURER		Model	AMPLIFIER SECTION										TUNER SECTION						
			FM Only - F AM Stereo Capable - A		THD, %	IHF IM, %	Rated Power Hz to kHz	MM Phono S/N, -dB	MM Phono Overload, mV	Dynamic Headroom, dB	Total Number of Memory Presets	IHF Sensitivity, dBf Mono Stereo	Signal Strength for 50-dB Quieting, dBf	Capture Ratio, dB	THD, % 1 kHz Mono Stereo	Alternate Channel Selectivity, dB Wide Narrow I.F. Bandwidth	Maximum S/N, -dB Mono Stereo	Weight, lbs.	Price, \$
			Average Watts per Channel & Ohms 4 Ohms																
ADS	R1		35	0.1	0.05	20-20	73	80	2.0	5	11.2/31	16.5/37.7	1.8	0.15/0.25	75	70/67	17.4	499.00	
AKAI	AA-V401	D	80	0.05		5-70	75	150		20	11.2	16.2/37.2	1.5	0.1/0.3	60	75/65	21.8	399.95	
	AA-V301	D	60	0.05		5-70	75	150		16	11.2	16.2/37.2	1.5	0.1/0.3	60	75/65	18.5	329.95	
	AA-V201	D	40	0.05		5-60	75	150		16	11.2	16.2/37.2	1.5	0.1/0.3	60	75/65	13.6	229.95	
	AA-A1	D	35	0.3		10-40	70	120		16	12.7	19.2/40.2	2.0	0.2/0.4	60	70/62	10.6	169.95	
BANG & OLUFSEN	Beomaster 8000	F/D	100/150	0.05	0.1	20-20	77	125	2	9	13/15	19/34	1.8	0.05/0.1	65	76/72	46.3	1599.00	
	Beomaster 5000	F/D	55	0.09	0.15	20-20	74	110	1	9	15/17	21/42	1.8	0.3/0.35	56	70/67	19.2	1399.00	
	Beomaster 6000	F	75	0.08	0.05	20-20	75	80	0.7	6	15/17	21/40	1.8	0.02/0.18	65	77/71	32	899.00	
	Beomaster 3000	F	30	0.1	0.1	20-20	75	50	1.6	5	17/22	23/43	1.7	0.3/0.35	60	72/67	15	599.00	
CARVER	Rec 2000 Receiver	D/A	200/130/90	0.15/0.05/0.15	0.05/0.05/0.05	5-100/5-100/5-100	84/82/82	100/150/100	1.3/1.3/1.3	12/12/16	11.3/16.3/11.3/16.3	16.1/23.5/16.1/23.5	1.5/1.5/1.5	0.15/0.2/0.15/0.2	62/58/56	82/85/80/84	35/28 1/2/32	1499.00/750.00/599.00	
	Rec 900	D																	
		D																	
DENON	DRA-355	D	41/86	0.05		5-40	80	150	3	10		16.4/38.5	1.2	0.07/0.12	55	82/80	15	280.00	
	DRA-555	D	55/95	0.015		5-40	86	150	3	16		16.4/38.5	1.2	0.07/0.12	55	82/80	17 1/2	420.00	
	DRA-755	D	75/175	0.01		5-40	90	200	3	16		16.4/38.5	1.2	0.05/0.07	55	85/81	21 1/2	550.00	
FISHER	TA-102 (2 Units)	D	100	0.05	0.05	20-20				16	16.1/25.2	17.2/42.1	1.5	0.4/0.5		70/65	21.1	399.95	
	TA-150 (2 Units)	D	150	0.009	0.009	20-20				16	13.2/19.2	17.2/40	1.0	0.4/0.5		75/70	32.9	599.95	
HARMAN/KARDON	hk385i	D	30	0.09		10-60	80	185		10	11.21/	16.8/37	1.5	0.08/0.12	60	74	13 7/8	235.00	
	hk395i	D	30	0.09		10-60	80	185		10	10.8	15.6/37	1.2	0.08/0.12	65	75	13 7/8	335.00	
	hk495i	D	45	0.09		10-60	80	185		16	10.8	15.6/37	1.2	0.08/0.12	65	75	15 7/8	435.00	
	hk690i	D	60	0.06		10-100	80	220		16	10.8	14.6/37	1.0	0.06/0.08	70	76	24 1/4	700.00	
HITACHI	HTA2	D	20	0.1	0.1	40-20	70	150		6	18.2/35.0	76/70		0.15/0.25		12	140.00		
	HTA25F	D	25	0.5	0.5	40-20	72	150		8	20.2/38.2	74/70		0.3/0.4		11	200.00		
	HTA35F	D	35	0.05	0.05	20-20	72	150		20	20.2/38.2	74/70		0.3/0.25		12	250.00		
	HTA55F	D	55	0.05	0.05	20-20	72	150		20	20.2/38.2	74/70		0.15/0.25		15.4	400.00		
	HTA70F	D	70	0.03	0.03	20-20	72	150		20	20.2/38.2	74/70		0.15/0.25		17.6	540.00		
JVC	R-X500B	D	100	0.007	0.007		80	120		30	10.8	14.8/38.3	1.5	0.08/0.1	75	82/73	20.5	650.00	
	R-X400B	D	70	0.007	0.007		80	120		30	10.8	14.8/38.3	1.5	0.08/0.1	75	82/73	19.6	500.00	
	R-X370VB	D	50	0.15						20	10.8	14.8/38.3	1.5	0.08/0.15	60	82/73	14.4	350.00	
	R-X330VB	D	55	0.03	0.03					30	10.8	14.8/38.3	1.5	0.08/0.15	60	82/73	15.5	330.00	
	R-X220	D	40	0.5						16	10.8	16.3/38.3	1.5	0.15/0.3	60	80/73	9.5	240.00	
	R-X110	D	25	0.5						16	10.8	16.3/38.3	1.5	0.15/0.3	60	80/73	8.4	175.00	
KENWOOD	KVR-A90R	D	70	0.007	0.002		85			20		14.2/36.8		0.07/0.1		19.8	490.00		
	KVR-A70R	D	55	0.008	0.002		73			20		14.2/36.8		0.07/0.1		18.5	400.00		
	KR-A70	D	55	0.008	0.002		73			20		14.2/36.8		0.07/0.1		18.1	320.00		
	KR-A20	D	40	0.5	0.1		73			16		17.2/37.2		0.2/0.3		12.1	230.00		
	KR-A10	D	30	0.5	0.1		73			16		17.2/37.2		0.2/0.3		11.7	185.00		

RECEIVERS

MANUFACTURER	Model	AMPLIFIER SECTION										TUNER SECTION							
		FM Only AM Stereo Capable	F. Digitally Synthesized - D A	Average Watts per Channel & Distortion	THD, %	HF 1M, %	Rated Power Hz to kHz	MM Phono S/N	MM Phono Overload	Dynamic Headroom, dB	Total Number of Memory Presets	HF Sensitivity, dB	Signal Strength for 50dB Quieting, dB	Capture Ratio, dB	THD, % 100% Modulation, 1 kHz	Alternate Channel Selectivity, dB Wide Narrow I.F. Bandwidth	Maximum S/N, -dB	Weight, Lbs.	Price, \$
KYCERA	R-861	F/D	100	0.02	0.02	10-60	85	150	1.0	14	9.8/17.3	14.8/35	1.0	0.06/0.07	40/85	82/76	27	975.00 w Remote	
	R-661	F/D	70	0.02	0.02	10-60	82	150	1.0	14	10.1/17.5	15.5/36.5	1.0	0.07/0.1	40/75	80/74	25	750.00 w Remote	
	R-461	F/D	50	0.02	0.02	10-80	82	150	2.1	12	10.3/17.8	17.0/37.2	1.2	0.09/0.15	55	77/72	18 1/2	550.00 w Remote	
LUXMAN	R404	D	33	0.08		20-20	76			16	10.8						13.4	300.00	
	R405	D	55	0.05		20-20	76			16	10.8						17.7	400.00	
	R406	D	60	0.05		20-20	76			16	10.3						18.7	570.00	
MARANTZ	SR250	D	25	0.25	0.25	20-20	75	120		16	12.1/	16.8/39.2	1.5	0.35/0.6	45	70/62	13.2	189.95	
	SR640	D/A	45	0.02	0.02	20-20	82	175		16	10.3/	14.4/36.0	1.2	0.1/0.2	60	70/62	18.3	299.95	
	SR840	D/A	70	0.02	0.02	20-20	83	200		16	9.8/	13.1/35.0	0.9	0.1/0.2	65	72/65	26.5	449.95	
SR940	D/A	100	0.01	0.01	20-20	85	225		16	9.8/	13.1/35.0	0.9	0.1/0.2	65	72/65	26.5	549.95		
McINTOSH	MAC4200		75/100	0.02	0.02	20-20	84			12	11.3/16	13/28	1.5	0.08/0.12	65	75/70	40	2890.00	
MITSUBISHI	DA-R56	D/A	70/	0.015		20-20				7			1.5	0.2/0.3	60	82/75	21 3/4	450.00	
	DA-R46	D	50/	0.015		20-20				7			1.5	0.2/0.3	60	82/75	20 1/2	390.00	
NAD	7155	D	55/90	0.03	0.03	20-20	78	170	3	5	9.8/32	13.2/42	1.5	0.09/0.09	70	82/75	20.5	598.00	
	7140	D	40/65	0.03	0.03	20-20	78	170	3	5	9.8/32	13.2/42	1.5	0.09/0.09	70	82/75	20.3	478.00	
	7130	D	30/48	0.03	0.03	20-20	76	170	3	5	10.3/34.2	14.2/44.3	1.5	0.09/0.09	70	82/75	17.7	348.00	
	7125	D	25/35	0.03	0.02	20-20	75	140	3	5	10.8/33	14.2/44	1.5	0.09/0.09	70	80/75	11.5	248.00	
NIKKO	NR-1050	D	100/175	0.03	0.03	10-50	88	200		20	7.3/35	7.3/35	1.5	0.1/0.2	60	70/67	24 3/8	699.95	
	NR-850	D	65/120	0.03	0.03	10-50	88	200		20	7.3/35	14/20	1.5	0.1/0.2	60	70/67	19 3/8	599.95	
	NR-750	D	48/75	0.04	0.04	15-35	75	150		16	14/20	14/20	1.0	0.1/0.2	60	70/67	14 3/4	379.95	
	NR-650	D	38/65	0.05	0.05	15-35	75	150		16	14/20	14/20	1.0	0.1/0.2	60	65/60	13 1/2	289.95	
	NR-350	D	32/50	0.05	0.05	15-35	75	150		16	14.2/35	13.2/35.2	0.75	0.1/0.2	60	65/60	12 7/8	199.95	
ONKYO	TX-858	D	80	0.02	0.02	20-20	87	180	1.2	16	10.3/17.2	14.7/37.2	1.3	0.1/0.18	70	76/70	33	619.95	
	TX-65	D	60	0.025	0.025	20-20	87	180	1.5	16	10.8/17.2	17.2/37.2	1.5	0.1/0.2	70	73/67	25	484.95	
	TX-RV478	D	55	0.08	0.08	20-20	75	150	1.2	16	11.2/29.5			0.15/0.3	55	71/66	20	499.95	
	TX-37	D	55	0.04	0.04	20-20	79	180	1.4	16	10.8/17.2	17.2/37.2	1.5	0.15/0.25	55	72/67	19	349.95	
	TX-27	D	40	0.08	0.08	20-20	79	180	1.3	16	11.2/17.2	17.2/37.2	1.5	0.15/0.3	55	71/66	17	264.95	
TX-17	D	25	0.3	0.1	40-20	79	180	0.8	12	12.4/19.2	18.2/38.2	1.5	0.15/0.3	55	70/65	13	199.95		
PARASOUND	DR65	D	65/100	0.04	0.015	20-40	88	200	2.0	12		15.3/39.2	1.6	0.1/0.2	68	80/77	23	449.95	
	DR40	D	40/70	0.04	0.03	20-20	88	200	2.0	10		15.3/38.1	1.6	0.1/0.2	68	80/77	19	299.95	
	DR25		25/40	0.04	0.03	20-20	88	180	2.0			15.8/39.2	1.6	0.15/0.25	66	80/77	16	199.95	
	SR222		22/33	0.1	0.1	20-20	70	140	1.0			39.2	2.5	0.3/0.5	64	70/65	14	179.95	
PIONEER ELECTRONICS	SX-V900	D	125	0.005	0.005	20-20	86	150		20	10.8	16.2/37.7	1.0	0.02/0.04	85	88/82	33.1	769.95	
	SX-V500	D	80	0.005	0.005	20-20	83	160		24	10.8/	15.7/37	1.0	0.1/0.15	65	80/75	18.5	459.95	
	SX-V400	D	60	0.005	0.005	20-20	73	160		24	10.8	15.7/37	1.0	0.1/0.15	65	80/75	15.1	329.95	
	SX-V300	D	45	0.08	0.08	20-20	72	140		16	10.8/	15.7/37	1.0	0.4/0.4	65	80/75	11.7	249.95	
	SX-V200	D	30	0.3	0.3	20-20	72	140		16	10.8	15.7/37	1.0	0.4/0.4	65	80/75	10.9	209.95	
	SX-313		45	0.3	0.3	40-20	71	150			10.7/	15.3/37.6	2.5	0.3/0.6	50	75/70	11	174.95	
	SX-212		25	0.3	0.3	40-20	71	150			10.7/	15.3/37.6	2.5	0.3/0.6	50	75/70	9.8	126.95	
PROTON	940	D	40/62	0.02	0.008	10-60	92	250	6	16	10.3	14.2/33.2	1.5	0.08/0.15	65	80/75	18		
QUASAR	CJ8494XE	D	45/	0.03		20-20	72		1.2/	12	16.1/10.8	16.1/38.3	1.0	0.15/0.3	65	77/71	18.3	699.95	
RCA	Dimensia MSR150	D	50/		0.05	20-20				16		21/38		0.13/0.15		75/69	16 1/2	350.00	
REALISTIC	STA-2500 (31-3012)	D	100	0.05	0.01	20-20	84	160		12	9.8/28	16/28	1.5	0.09/0.2	70	70/		499.95	
	STA-2270 (31-3005)	D	65	0.05	0.01	20-20	85	165		12	9.8/28	16/28	1.25	0.04/0.08	75	75/		399.95	
	STA-780 (31-2068)	D	45	0.08	0.05	20-20	84	120		12	10.8/23	16/37	1.5	0.09/0.2	70	72/70		349.95	
	STA-114 (31-2007)	D	30	0.05	0.01	20-20	84	155		12	9.8/28	17/30	1.5	0.09/0.2	60	70/		299.95	
	STA-870 (31-3001)		65	0.08	0.05	20-20	83	175			9.8/19	17/37	1.0	0.1/0.15	65	78/		359.95	
	STA-115 (31-2098)		24	0.03	0.05	20-20	85	120			10.8/21	16/37	1.2	0.1/0.2	60	74/		199.95	
	STA-450 (31-2094)		14	0.3	0.1	20-20	81	120			13.7/22	19/39	2.0	0.1/0.3	60	78/		159.95	
	STA-19 (31-1975)		5	0.09	0.04	40-20	70				22.3/22.3	28/	3.0	0.5/1.0	55	60/		119.95	
REVOX	B285	D	70/90	0.03	0.03	20-20	80	50	3	29	12.8/	15.2/36.8	2	0.15/0.3		84/80	33 1/4	1600.00	
ROTEL	RX 830	D	20	0.08	0.08	20-20	80	90		16		17.2/40.7	2.0	0.3/0.5	65		13	199.00	
	RX 850	D	30	0.05	0.05	20-20	80	150				17.2/40.7	1.5	0.15/0.4	60		15	299.00	
SAE	R102	D	50	0.025	0.025	20-20	82	150	0.2	16	11.2/17.2	14.4/35.8	1.7	0.10/0.15	30	75/70	26	499.00	
SANSUI	S-XV1000	D	80/	0.01		20-20	85			16	10.3/19	14/37	1.0	0.1/0.15		80	20.3	599.00	
	S-X1130	D/A	130	0.005	0.005	20-20	85			16	10.3/19	14/37	1.0	0.03/0.05		80	35.9	950.00	
	S-X1100	D/A	100	0.005	0.005	20-20	85			16	10.3/19	14/37	1.0	0.1/0.15		80	32.4	800.00	
	S-X1070	D/A	55/	0.02	0.02	20-20	80			12	10.8	17/37	1.0	0.2/0.3		76	15	400.00	
	S-X1050	D	35/	0.02	0.02	20-20	73			12	10.8	17/37	1.0	0.2/0.3		76	12.6	300.00	
	S-X1030	D	25/	0.05	0.05	20-20	73			12	10.8	17/37	1.0	0.2/0.3		76	11.2	250.00	

RECEIVERS

MANUFACTURER	Model	FM Only = F, Digital Synthesized = D, MM Stereo Capable = S	AMPLIFIER SECTION										TUNER SECTION						
			Average Watts per Channel	THD, %	IHF, IM, %	Rated Power, W	Hz to kHz	MM Stereo S/N, dB	MM Stereo S/N, dB	Dynamic Headroom, mV	Total Number of Memory Presets	IHF Sensitivity, dB	Signal Strength for 50-dB Quieting, dB	Capture Ratio, dB	THD, %	Alternate Channel Selectivity, dB	Maximum S/N, dB	Weight, Lbs.	Price, \$
H. H. SCOTT	388RS	D	85	0.03	0.03	20-20	80			14		9.8	1.0					550.00	
	366RS	D	65	0.03	0.03	20-20	80			14		9.8	1.0					450.00	
	355RS	D	45	0.03	0.03	20-20	80			14		9.8	1.0					350.00	
SHARP	SA-X25	D	25	0.9	0.2	40-20	75	100		12	11.7				0.4/0.6	56	70.65	9.3	119.95
	SA-X35	D	35	0.5	0.15	40-20	75	130		12	10.8				0.15/0.3	56	70.65	10	199.95
SHERWOOD	S-2610CP	D	20/28	0.08	0.08	20-20	85	140		0	11.2	14.7/37.3	1.5	0.151/0.151	65	80/75	15	149.95	
	S-2620CP	D	20/32	0.05	0.05	20-20	88	140	1.3	10	10.8	15.8/39.2	1.5	0.15/0.15	65	78/72	15	179.95	
	S-2640CP	D	35/53	0.05	0.05	20-20	88	140	1.4	12	10.8	15.8/39.2	1.5	0.15/0.15	65	78/72	17	279.95	
	S-2660CP	D	50/70	0.05	0.05	20-20	92	250	1.2	16	10.3	15.3/36.5	1.2	0.1/0.1	70	80/75	20	379.95	
	S-2680CP	D	70/100	0.05	0.05	20-20	92	250	1.2	16	9.8	14.1/36.5	1.2	0.1/0.1	70	80/75	22	479.95	
SONY	STR-AV260	D	25	0.08	0.08		78			10	11.2	17.3/38.3		0.15/0.3	60	78/73	10.5	180.00	
	STR-AV360	D	35	0.03	0.03		83			10	11.2	17.3/38.3		0.15/0.25	60	80/75	13.5	240.00	
	STR-AV460	D	45	0.008	0.008		83			10	11.2	17.3/38.3		0.15/0.25	60	80/75	14.1	300.00	
	STR-AV560	D	60	0.008	0.008		93			10	10.3	16.1/38.3		0.05/0.1	30/65	82/76	17.7	400.00	
	STR-AV760	D	80	0.006	0.006		93			10	10.3	16.1/38.3		0.05/0.1	30/65	82/76	19.5	500.00	
TECHNICS	SA-120		35	0.5	0.5	40-20	73	120	1.0		10.8	16.1/38.3	1.0	0.15/0.3	60	76/70	10.8	150.00	
	SA-150	D	25	0.5	0.5	40-20	73	140	1.2	14	10.8	16.1/38.3	1.0	0.15/0.3	65	77/71	9.3	170.00	
	SA-360	D	40	0.05	0.01	20-20	76	150	1.2	16	10.8	16.1/38.3	1.0/1.0	0.15/0.3	65	78/72	11.9	220.00	
	SA-460	D	50	0.007	0.01	20-20	75	150	1.2	16	10.8	16.1/38.3	1.0	0.08/0.15	70	78/72	14.5	320.00	
	SA-560	D	70	0.007	0.01	20-20	75	150	1.8	16	10.8	16.1/38.3	1.0	0.08/0.15	70	78/72	17.4	550.00	
VECTOR RESEARCH	VR-2200A		20/25	0.08	0.08	20-20	80		2.0	16	10.8	17.2	1.0	0.15/0.3		75/70	13	170.00	
	VRX-3500		30/40	0.08	0.08	20-20	80		2.5	16	10.8	17.2	1.0	0.15/0.3		80/75	17	250.00	
	VRX-7100		40/60	0.08	0.08	20-20	80		3.0	16	10.2	14.6	1.0	0.08/0.1		80/75	17	350.00	
	VRX-9100		70/100	0.08	0.08	20-20	80		3.0	16	10.2	14.6	1.0	0.08/0.1		80/75	23	450.00	
YAMAHA	R-9	D	125	0.015	0.01	10-50	92	110	1.58	16	8.8	14.8/37.3	1.2/2.5	0.05/0.07	85	85/81	26 1/2	799.00	
	R-8	D	85	0.015	0.01	10-50	92	110	1.84	16	8.8	14.8/37.3	1.2/2.5	0.05/0.07	85	85/81	24 1/4	599.00	
	R-7	D	65/144	0.015	0.01	10-50	92	110	1.8	16	9.3	15.1/37.7	1.2/2.5	0.05/0.07	85	85/81	14 1/2	469.00	
	R-5	D	50	0.015	0.01	10-50	88		1.76	16	9.3	15.1/37.7		0.07/0.1	85	80/76	12 1/2	299.00	
	R-3	D	35	0.04	0.04	10-40	88		1.88	16	9.3	15.1/37.7		0.1/0.2	85	81/76	11 1/2	229.00	

Discwasher.[®] The clear choice for record care.

Where do you turn to get the best sound from your records? The answer is clear. To the Discwasher D4™ Record Care System. Its scientific design uses a unique fluid and directional micro-fiber pad to clean

records safely. Without leaving residues behind. And the SC-2™ Stylus Care System loosens and wipes away damaging stylus contaminants. All to keep your records playing clean and clear.

You can trust Discwasher.

The clear choice for tape and video care, too.

Discwasher, leader in the technology of audio and video care products, also provides advanced systems for cleaning tape decks and VCR's.



The sound and sight come through clean and clear.

discwasher

©1985 Discwasher
A DIVISION OF INTERNATIONAL JENSEN INC.

1407 North Providence Road, P.O. Box 6021, Columbia, MO 65205

Enter No. 27 on Reader Service Card